

ژنراتور : Stamford

موتور دیزل : Deutz

Standby		Prime		دیزل ژنراتور
KVA	KW	KVA	KW	
110	88	100	80	



### موتور دیزل

Manufacturer	Deutz	تولید کننده
Type	TD226B-6D	تیپ
Number of cylinders	4	تعداد سیلندر ها
Cylinder arrangement	Vertical in-line	آرایش سیلندر ها
Cycle	4 stroke	چرخه
Aspiration	Turbo charged	سیستم تنفس
Bore × Stroke, mm	105X120	قطر سیلندر × کورس پیستون
Displacement, Liters	4	جا به جایی
Speed Governor	Mechanical	سرعت گاورنر
Cooling System	water-cooled	سیستم خنک کننده
Frequency	50Hz	فرکانس
Starter Motor	24V	استارتر موتور

### ژنراتور

Manufacturer	Stamford	تولید کننده
Type	UCI274C	تیپ
Exciter type	Brushless	نوع کانتر
Power factor	0.8	ضریب قدرت
Voltage	380	ولتاژ
Frequency	50 Hz	فرکانس
Speed, Rpm	1500	سرعت
Insulation class	H	کلاس عایق
Protection class	IP23	کلاس حفاظتی
Excitation	Brushless	سیستم تمریک

## DEUTZ DIESEL ENGINE MODEL TD226B-6D

<b>Engine Model:</b>	TD226B-6D
<b>Engine Type:</b>	6 Cylinders, in Line
<b>Displacement:</b>	6.23 L
<b>Advertised Power/Speed:</b>	90kW/1500rpm 105kW/1800rpm
<b>Aspiration Method:</b>	Turbocharged
<b>Cooling Method:</b>	Water-cooled
<b>Emission Standard:</b>	Euro II
<b>Fuel Consumption:</b>	≤208g/kw.h
<b>Packing Size(L*W*H):</b>	1800mm*980mm*1300mm
<b>Gross Weight:</b>	723kg
<b>Delivery Time:</b>	10-20 working days
<b>Payment Terms:</b>	T/T ,L/C

---

### Weichai TD226B-6D Diesel Generators Engine

#### General Information of Weichai TD226B-6D Generators Engine

Engine Model	TD226B-6D
Engine Type	6 Cylinders,in Line
Displacement	6.23L
Bore*Stroke(mm)	105mm*120mm
Ignition Sequence	1-5-3-6-2-4
Certification	Euro II
Net Weight (Pricing Configuration)	673kg
Overall Diemension(L*W*H)	1350mm*740mm*1150mm

### Technical Specification of Weichai TD226B-6D Generators Engine


Control System	Mechanical/Electrical Governor
Aspiration	Turbocharged
Flywheel Cover	SAE1,SAE3
Starter Motor	12V/3kW
Alternator	14V/55A
Battery Voltage	12V or 24V

### Performance Data of Weichai TD226B-6D Generators Engine

Advertised Power/Speed	90kW/1500rpm
Advertised Power/Speed	105kW/1800rpm
Fuel consumption with full-load(g/kw.h)	$\leq 208$ g/kw.h
Idel Speed	600 $\pm$ 50rpm
The maximum altitude to adapt	4000

# STAMFORD®

## UCI274C - Technical Data Sheet

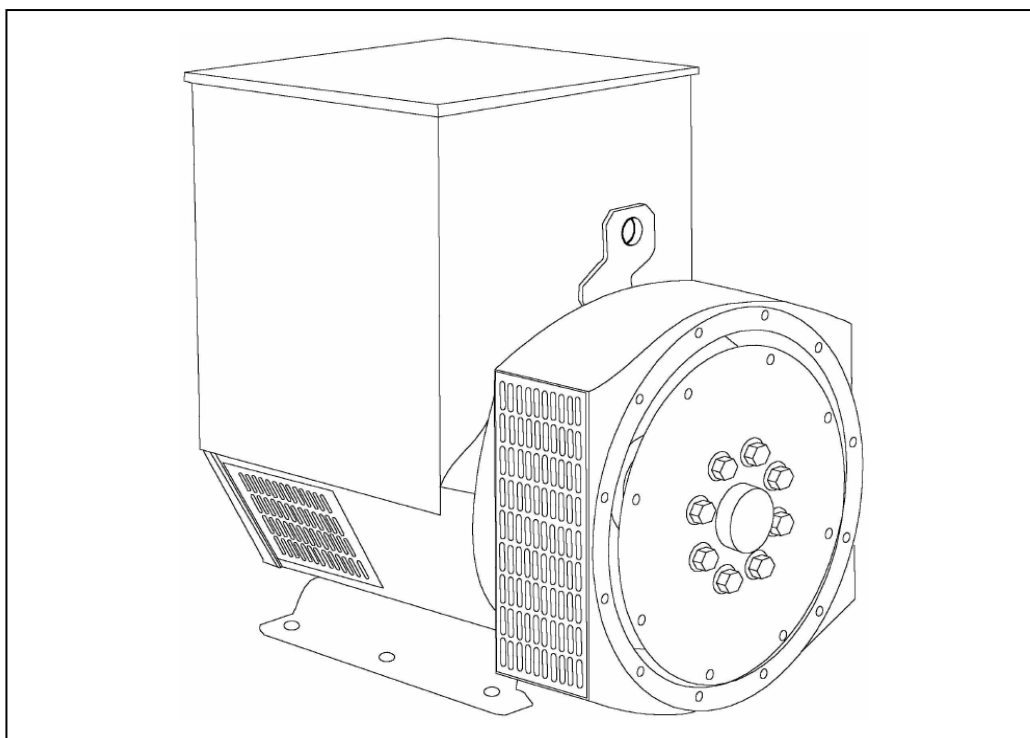

# UCI274C

## SPECIFICATIONS & OPTIONS

**STAMFORD**

### STANDARDS

Newage Stamford industrial generators meet the requirements of BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100, AS1359. Other standards and certifications can be considered on request.

### VOLTAGE REGULATORS

#### SX460 AVR - STANDARD

With this self excited control system the main stator supplies power via the Automatic Voltage Regulator (AVR) to the exciter stator. The high efficiency semiconductors of the AVR ensure positive build-up from initial low levels of residual voltage.

The exciter rotor output is fed to the main rotor through a three phase full wave bridge rectifier. This rectifier is protected by a surge suppressor against surges caused, for example, by short circuit.

#### AS440 AVR

With this self-excited system the main stator provides power via the AVR to the exciter stator. The high efficiency semi-conductors of the AVR ensure positive build-up from initial low levels of residual voltage.

The exciter rotor output is fed to the main rotor through a three-phase full-wave bridge rectifier. The rectifier is protected by a surge suppressor against surges caused, for example, by short circuit or out-of-phase paralleling.

The AS440 will support a range of electronic accessories, including a 'droop' Current Transformer (CT) to permit parallel operation with other ac generators.

#### MX341 AVR

This sophisticated AVR is incorporated into the Stamford Permanent Magnet Generator (PMG) control system.

The PMG provides power via the AVR to the main exciter, giving a source of constant excitation power independent of generator output. The main exciter output is then fed to the main rotor, through a full wave bridge, protected by a surge suppressor. The AVR has in-built protection against sustained over-excitation, caused by internal or external faults. This de-excites the machine after a minimum of 5 seconds.

An engine relief load acceptance feature can enable full load to be applied to the generator in a single step.

If three-phase sensing is required with the PMG system the MX321 AVR must be used.

We recommend three-phase sensing for applications with greatly unbalanced or highly non-linear loads.

#### MX321 AVR

The most sophisticated of all our AVRs combines all the features of the MX341 with, additionally, three-phase rms sensing, for improved regulation and performance.

Over voltage protection is built-in and short circuit current level adjustments is an optional facility.

### WINDINGS & ELECTRICAL PERFORMANCE

All generator stators are wound to 2/3 pitch. This eliminates triplen (3rd, 9th, 15th ...) harmonics on the voltage waveform and is found to be the optimum design for trouble-free supply of non-linear loads. The 2/3 pitch design avoids excessive neutral currents sometimes seen with higher winding pitches, when in parallel with the mains. A fully connected damper winding reduces oscillations during paralleling. This winding, with the 2/3 pitch and carefully selected pole and tooth designs, ensures very low waveform distortion.

### TERMINALS & TERMINAL BOX

Standard generators are 3-phase reconnectable with 12 ends brought out to the terminals, which are mounted on a cover at the non-drive end of the generator. A sheet steel terminal box contains the AVR and provides ample space for the customers' wiring and gland arrangements. It has removable panels for easy access.

### SHAFT & KEYS

All generator rotors are dynamically balanced to better than BS6861:Part 1 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.

### INSULATION/IMPREGNATION

The insulation system is class 'H'.

All wound components are impregnated with materials and processes designed specifically to provide the high build required for static windings and the high mechanical strength required for rotating components.

### QUALITY ASSURANCE

Generators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.

The stated voltage regulation may not be maintained in the presence of certain radio transmitted signals. Any change in performance will fall within the limits of Criteria 'B' of EN 61000-6-2:2001. At no time will the steady-state voltage regulation exceed 2%.

*NB Continuous development of our products entitles us to change specification details without notice, therefore they must not be regarded as binding.*

*Front cover drawing typical of product range.*

# UCI274C



## WINDING 311

CONTROL SYSTEM		SEPARATELY EXCITED BY P.M.G.							
A.V.R.		MX321	MX341						
VOLTAGE REGULATION		± 0.5 %	± 1.0 %	With 4% ENGINE GOVERNING					
SUSTAINED SHORT CIRCUIT		REFER TO SHORT CIRCUIT DECREMENT CURVES (page 7)							
CONTROL SYSTEM		SELF EXCITED							
A.V.R.		SX460	AS440						
VOLTAGE REGULATION		± 1.0 %	± 1.0 %	With 4% ENGINE GOVERNING					
SUSTAINED SHORT CIRCUIT		SERIES 4 CONTROL DOES NOT SUSTAIN A SHORT CIRCUIT CURRENT							
INSULATION SYSTEM		CLASS H							
PROTECTION		IP23							
RATED POWER FACTOR		0.8							
STATOR WINDING		DOUBLE LAYER CONCENTRIC							
WINDING PITCH		TWO THIRDS							
WINDING LEADS		12							
STATOR WDG. RESISTANCE		0.059 Ohms PER PHASE AT 22°C SERIES STAR CONNECTED							
ROTOR WDG. RESISTANCE		1.12 Ohms at 22°C							
EXCITER STATOR RESISTANCE		20 Ohms at 22°C							
EXCITER ROTOR RESISTANCE		0.091 Ohms PER PHASE AT 22°C							
R.F.I. SUPPRESSION		BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. refer to factory for others							
WAVEFORM DISTORTION		NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%							
MAXIMUM OVERSPEED		2250 Rev/Min							
BEARING DRIVE END		BALL. 6315-2RS (ISO)							
BEARING NON-DRIVE END		BALL. 6310-2RS (ISO)							
		1 BEARING				2 BEARING			
WEIGHT COMP. GENERATOR		406 kg				420 kg			
WEIGHT WOUND STATOR		131 kg				131 kg			
WEIGHT WOUND ROTOR		133.78 kg				122.82 kg			
WR <sup>2</sup> INERTIA		1.0288 kgm <sup>2</sup>				0.9781 kgm <sup>2</sup>			
SHIPPING WEIGHTS in a crate		439 kg				452 kg			
PACKING CRATE SIZE		105 x 67 x 103(cm)				105 x 67 x 103(cm)			
		50 Hz				60 Hz			
TELEPHONE INTERFERENCE		THF<2%				TIF<50			
COOLING AIR		0.514 m <sup>3</sup> /sec 1090 cfm				0.617 m <sup>3</sup> /sec 1308 cfm			
VOLTAGE SERIES STAR		380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
VOLTAGE PARALLEL STAR		190/110	200/115	208/120	220/127	208/120	220/127	230/133	240/138
VOLTAGE SERIES DELTA		220/110	230/115	240/120	254/127	240/120	254/127	266/133	277/138
KVA BASE RATING FOR REACTANCE VALUES		100	100	100	N/A	112.5	117.5	117.5	125
Xd DIR. AXIS SYNCHRONOUS		2.45	2.21	2.05	-	2.76	2.58	2.36	2.30
X'd DIR. AXIS TRANSIENT		0.20	0.18	0.17	-	0.24	0.22	0.21	0.20
X''d DIR. AXIS SUBTRANSIENT		0.14	0.13	0.12	-	0.16	0.15	0.14	0.13
Xq QUAD. AXIS REACTANCE		1.59	1.43	1.33	-	1.58	1.48	1.35	1.32
X''q QUAD. AXIS SUBTRANSIENT		0.18	0.16	0.15	-	0.23	0.21	0.20	0.19
X <sub>L</sub> LEAKAGE REACTANCE		0.07	0.06	0.06	-	0.08	0.07	0.07	0.07
X <sub>2</sub> NEGATIVE SEQUENCE		0.16	0.14	0.13	-	0.19	0.18	0.16	0.16
X <sub>0</sub> ZERO SEQUENCE		0.10	0.09	0.08	-	0.12	0.11	0.10	0.10
REACTANCES ARE SATURATED			VALUES ARE PER UNIT AT RATING AND VOLTAGE INDICATED						
T'd TRANSIENT TIME CONST.		0.028 s							
T''d SUB-TRANSTIME CONST.		0.001 s							
T'do O.C. FIELD TIME CONST.		0.8 s							
T <sub>a</sub> ARMATURE TIME CONST.		0.007 s							
SHORT CIRCUIT RATIO		1/Xd							






50  
Hz

UCI274C  
Winding 311

**STAMFORD**

**THREE PHASE EFFICIENCY CURVES**


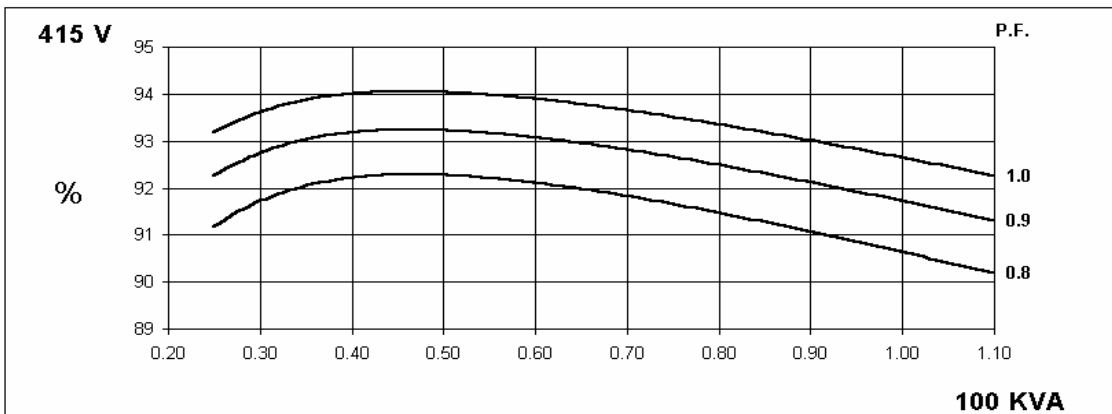
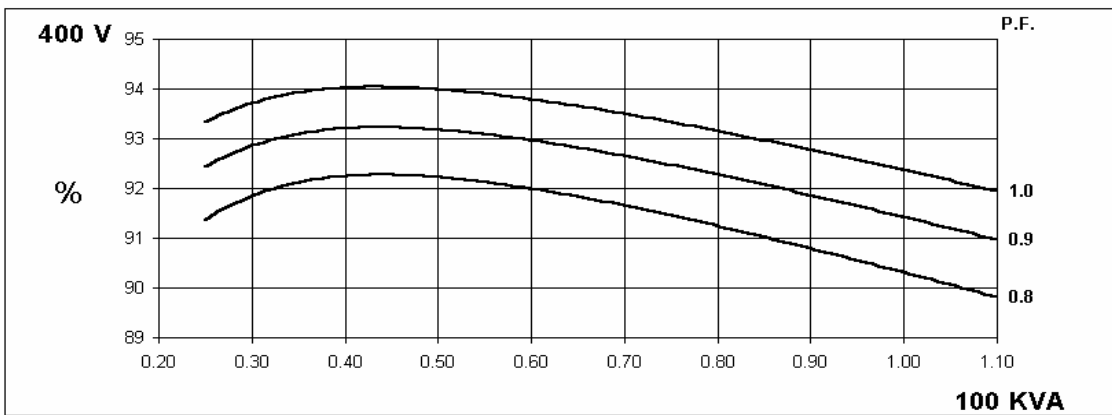
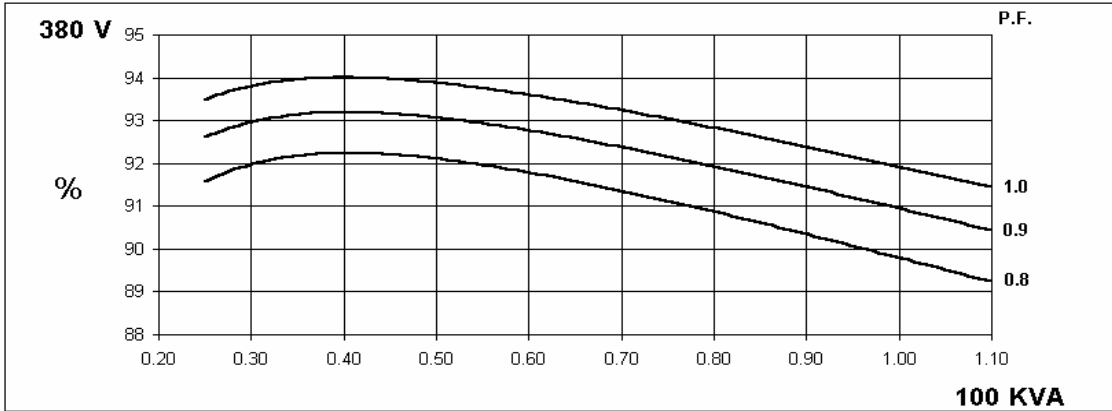


60  
Hz

UCI274C  
Winding 311

**STAMFORD**

**THREE PHASE EFFICIENCY CURVES**

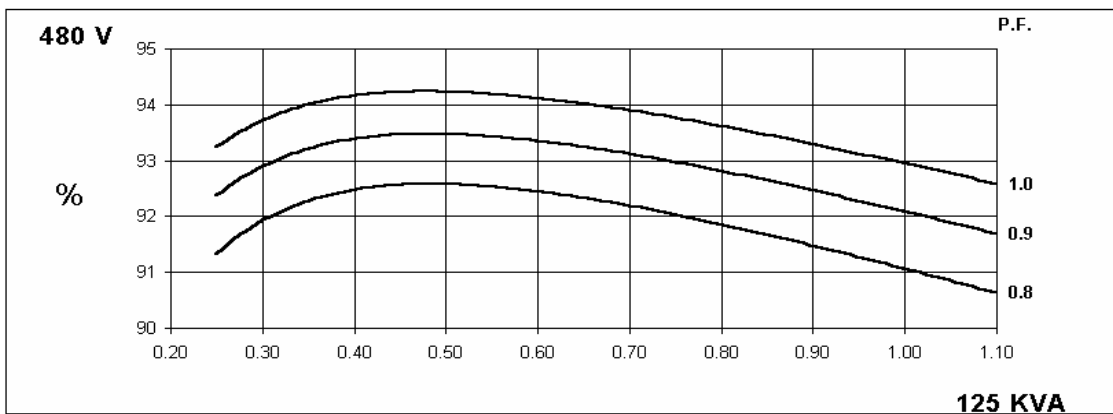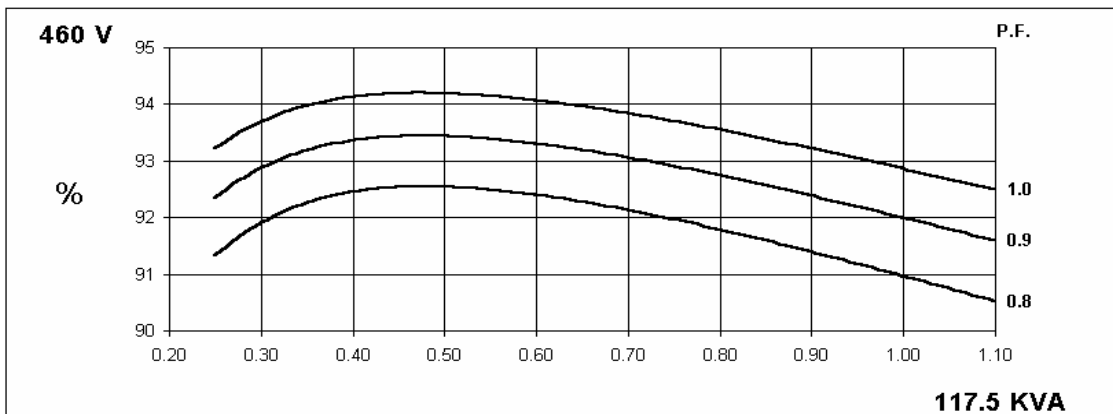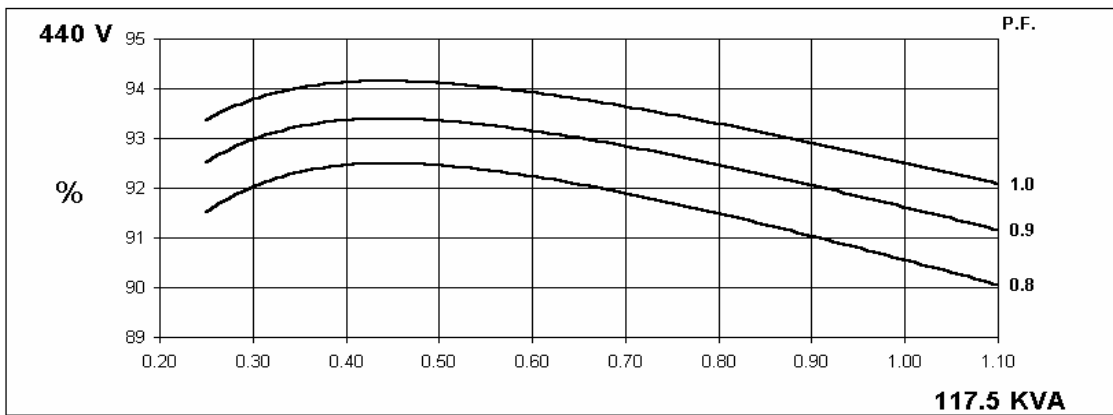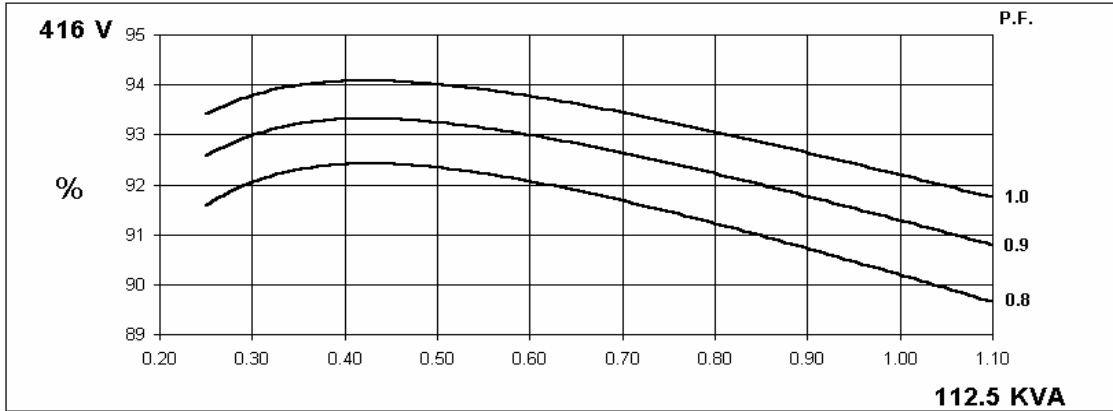

UCI274C  
Winding 311



STAMFORD

Locked Rotor Motor Starting Curve

50  
Hz

MX



SX

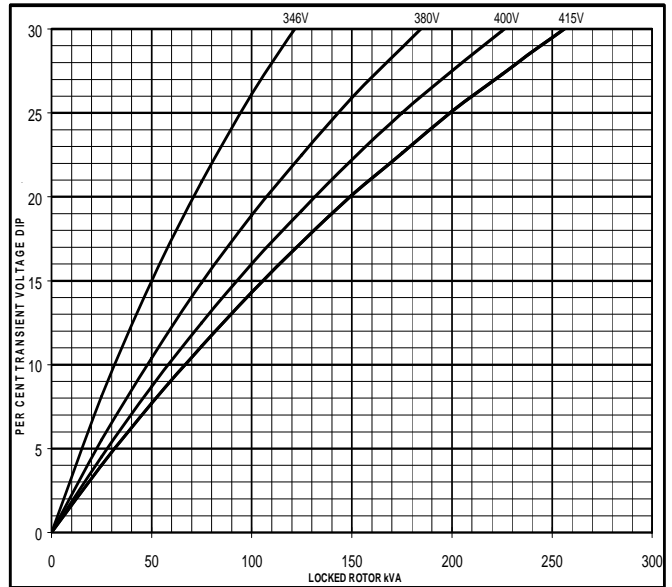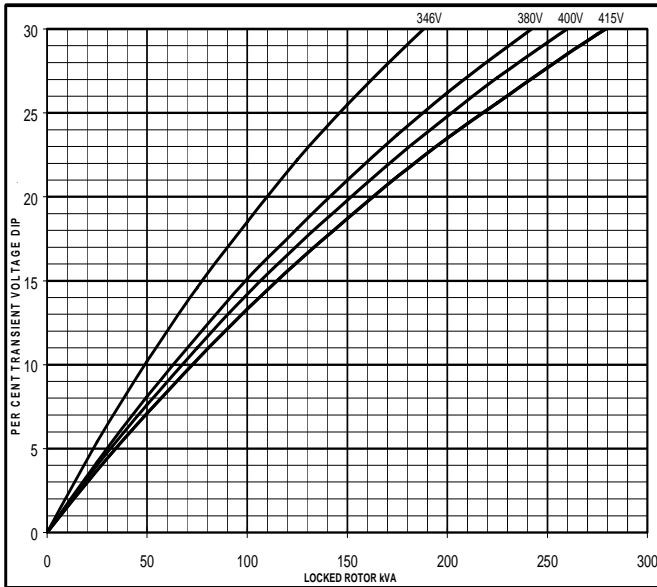

60  
Hz


MX

SX

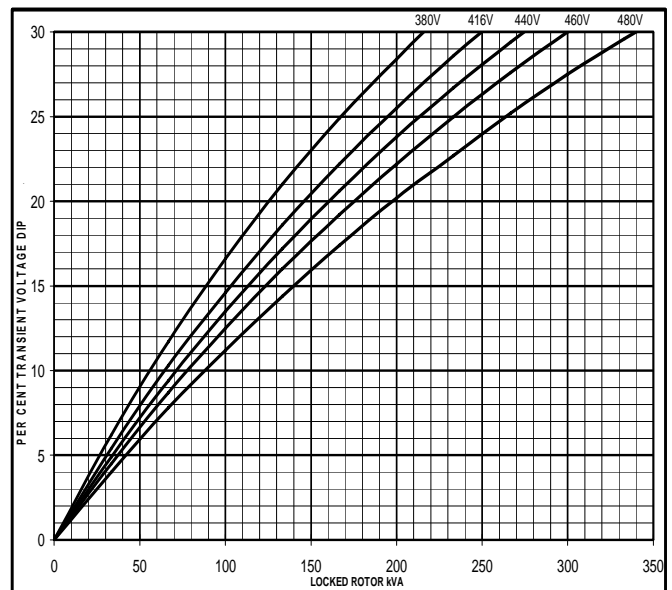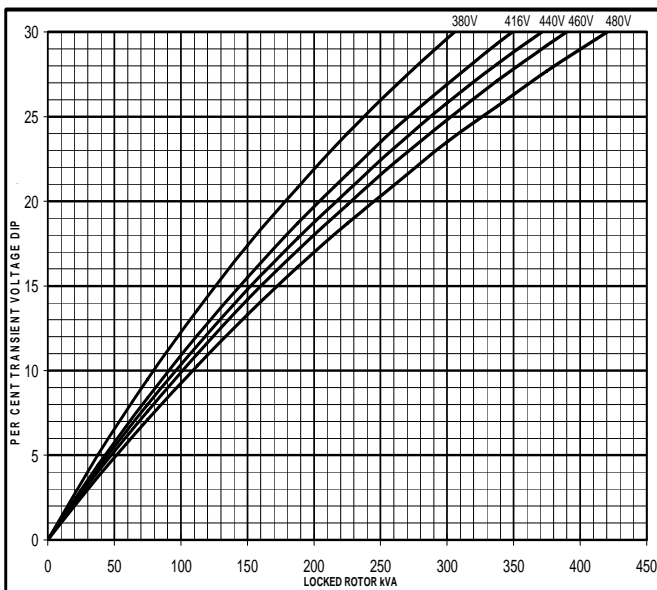


**Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed  
Based on star (wye) connection.**

**50  
Hz**

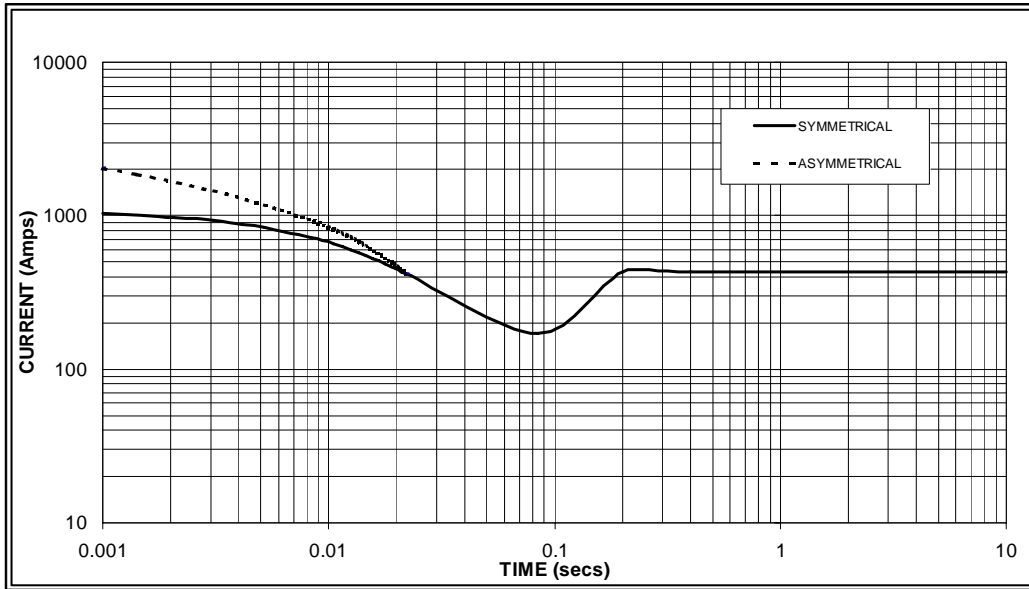

Sustained Short Circuit = 430 Amps

**60  
Hz**

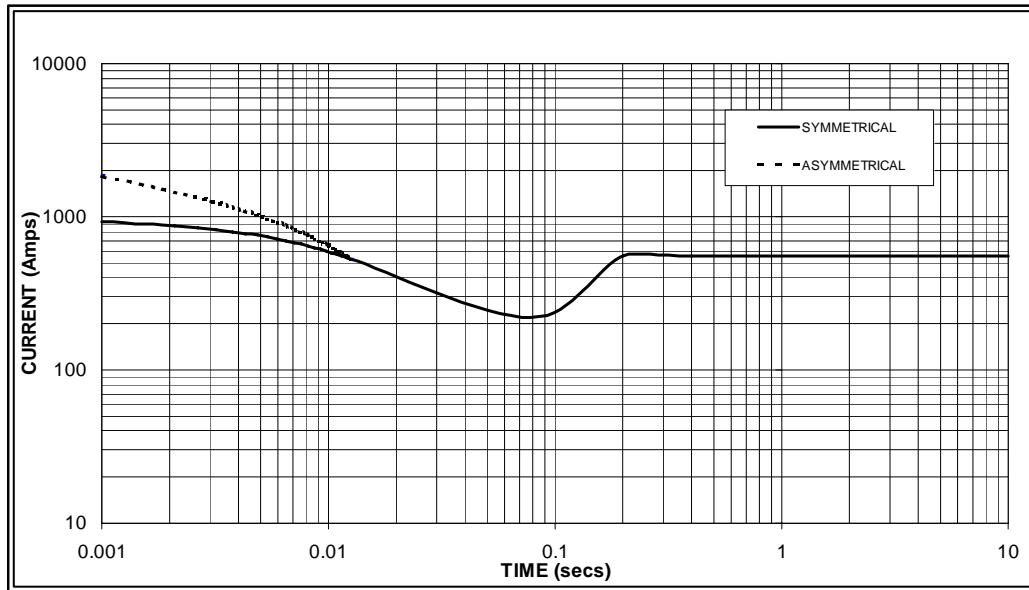

Sustained Short Circuit = 550 Amps

**Note 1**

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380v	X 1.00	416v	X 1.00
400v	X 1.07	440v	X 1.06
415v	X 1.12	460v	X 1.12
		480v	X 1.17

The sustained current value is constant irrespective of voltage level

**Note 2**

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

**Note 3**

Curves are drawn for Star (Wye) connected machines. For other connection the following multipliers should be applied to current values as shown :

Parallel Star = Curve current value X 2

Series Delta = Curve current value X 1.732


**UCI274C**  
**Winding 311 / 0.8 Power Factor**

**RATINGS**

Class - Temp Rise	Cont. F - 105/40°C				Cont. H - 125/40°C				Standby - 150/40°C				Standby - 163/27°C				
<b>50 Hz</b>	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Parallel Star (V)	190	200	208	220	190	200	208	220	190	200	208	220	190	200	208	220
	Series Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
kVA	84.0	84.0	84.0	N/A	100.0	100.0	100.0	N/A	106.0	106.0	106.0	N/A	110.0	110.0	110.0	N/A	
kW	67.2	67.2	67.2	N/A	80.0	80.0	80.0	N/A	84.8	84.8	84.8	N/A	88.0	88.0	88.0	N/A	
Efficiency (%)	90.7	91.1	91.3	N/A	89.8	90.3	90.6	N/A	89.5	90.0	90.4	N/A	89.2	89.8	90.2	N/A	
kW Input	74.1	73.8	73.6	N/A	89.1	88.6	88.3	N/A	94.7	94.2	93.8	N/A	98.7	98.0	97.6	N/A	

<b>60 Hz</b>	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Parallel Star (V)	208	220	230	240	208	220	230	240	208	220	230	240	208	220	230	240
	Series Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
kVA	97.5	106.3	106.3	112.5	112.5	117.5	117.5	125.0	116.3	125.0	125.0	132.5	120.0	127.5	127.5	137.5	
kW	78.0	85.0	85.0	90.0	90.0	94.0	94.0	100.0	93.0	100.0	100.0	106.0	96.0	102.0	102.0	110.0	
Efficiency (%)	90.9	91.0	91.4	91.5	90.2	90.6	91.0	91.1	90.0	90.2	90.7	90.8	89.8	90.1	90.6	90.6	
kW Input	85.8	93.5	93.0	98.4	99.8	103.8	103.3	109.8	103.4	110.9	110.3	116.7	106.9	113.2	112.6	121.4	

**DIMENSIONS**

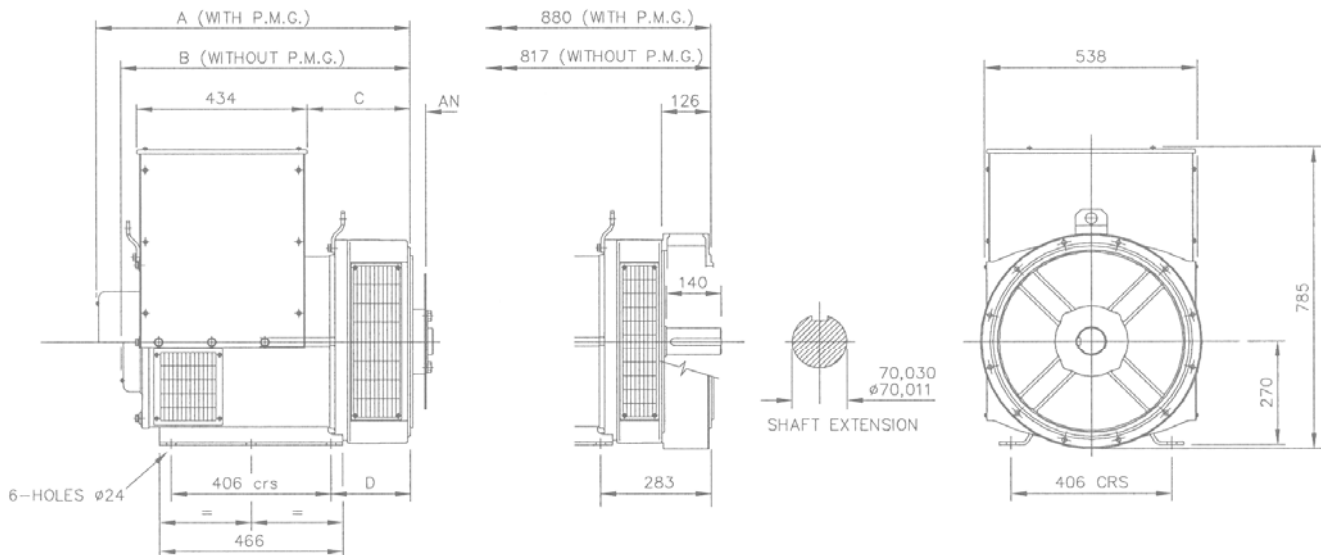

SINGLE BEARING ADAPTORS				
ADAPTOR	A	B	C	D
SAE 1	813,3	750,3	274,3	216,3
SAE 2	799	736	260	202
SAE 3	799	736	260	202

COUPLING DISCS	
DISC	AN
SAE 10	53,98
SAE 11,5	39,68
SAE 14	25,40