



Timber, steel, aluminium, tubes etc. - our machines master all kinds of operations in most diverse industries.



References and applications

bulmor industries GmbH
Kickenau 1
A-4320 Perg

t +43 7262 58397-0
f +43 7262 52297-11
e info@bulmor.com

-  Sideloaders
-  Multidirectional Sideloaders
-  Ground Support Equipment



Symbolfoto

Sideloaders DQ 130-150

built to work.

Technical Information



Sideloader DQ 130-150


Mast Matrix DQ-Heavy-Line-Sideloader 13-15 to.
Platform width max. 2000 mm, wider than 2000 mm on demand

mast fully lowered, mast fully extended, free lift

		DQ 130-150 *			
		Lift height (h3)	Height lowered (h1)	Height extended (h4) **	Free lift (h5) **
Duplex-Mast without freelif	4000	4000	3550	5590	0
	4500	4500	3800	6090	0
	5000	5000	4050	6590	0
	5500	5500	4300	7090	0
	6000	6000	4550	7590	0
Duplex- Freelif-Mast	4000	4000	3650	5625	2025
	4500	4500	3900	6125	2275
	5000	5000	4150	6625	2525
	5500	5500	4400	7125	2775
	6000	6000	4650	7625	3025
Triplex-Mast	4500	4500	3070	6125	1445
	5000	5000	3230	6625	1605
	5500	5500	3400	7125	1775
	6000	6000	3570	7625	1945
	6500	6500	3730	8125	2105
	7000	7000	3900	8625	2275
	7500	7500	4070	9125	2445
	8000	8000	4230	9625	2605

* ... and identical types in construction

** ... with standard carriage

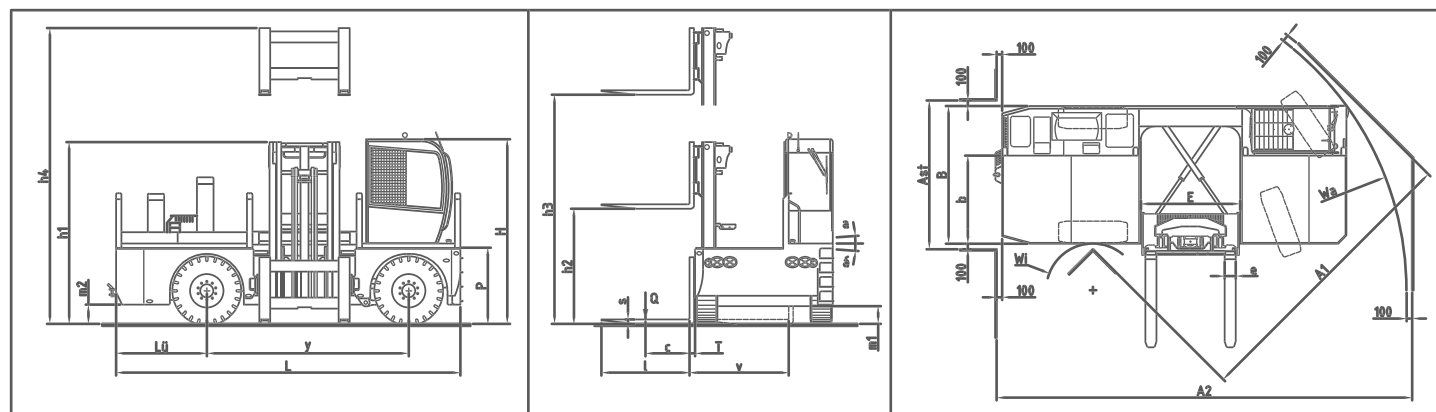

Manufacturer specifications and quality characteristics

				Bulmor industries GmbH			
Characteristics	1	Manufacturer					
	2	Type	manufacturer's type designation		DQ 130/16 (18)	DQ 150/16 (18)	
	3	Lifting capacity	Q	without stabilisers	t	13	15
	4	Load centre	c	distance	mm	800 (900)	800 (900)
	5	Drive	diesel, LPG, electro		diesel		
	6	Operator position			seated		
	7	Type of steering	V-solid rubber, L-pneumatic, front/rear		L / L	L / L	
	8	Wheels	number front/rear (X= drive wheels)		2/2X	2/2X	
Dimensions	9	Lift	h3	lift height	mm	4000	4000
	10		h2	free lift	mm	no free lift	no free lift
	11	Fork carriage	fork spread		mm	500 - 1640	500 - 1640
	12	Fork dimensions	s/e/l		mm	80 (90) /250/1600 (1800)	80 (90) /250/1600 (1800)
	13	Tilt of mast	forward/backward		degree	±4,5° (±3,8°)	±4,5° (±3,8°)
	14	Overall dimensions	L	Overall length	mm	6650	6650
	15		B	Overall width	mm	2600 (2800)	2600 (2800)
	16		h1	height, mast lowered	mm	3550	3550
	17		h4	height, mast extended	mm	5590	5590
	18		H	overall height cabin	mm	3520	3520
	19	Platform	b	platform width	mm	1600 (1800)	1600 (1800)
	20		E	well width	mm	1800	1800
	21		P	platform height	mm	1530*	1530*
	22	Mast reach	T	fork face standout	mm	100	100
	23		V	traverse stroke	mm	1700 (1900)	1700 (1900)
	24	Overhang length	Lü		mm	1730	1730
	25	Turning radius	outer/inner		mm	6090 (6210) /970	6090 (6210) /970
	26	Aisle width	Ast	for driving straight line	mm	2800 (3000)	2800 (3000)
	27		A1	for 90° turning	mm	5620 (5740)	5620 (5740)
	28		A2	for 90° turning within aisle	mm	8020 (8140)	8020 (8140)
Performance	29	Speed	travel speed with/without load		km/h	24/25	24/25
	30		lift speed with 80% max. load/without load		m/s	0,28/0,28	0,28/0,28
	31		lowering speed with/without load		m/s	0,57/0,23	0,57/0,23
	32		traverse speed		m/s	0,32	0,32
	33	Drawbar pull			daN	8300	8300
34	Gradeability	with/without load		%	21/36	19/34	
Weight	35	Machine weight	without load		kg	21400 (21900)	22900 (23400)
	36	laden weight	front axle		kg	16410 (16640)	18100 (18330)
	37	laden weight	rear axle		kg	17990 (18260)	19800 (20070)
Chassis	38	Tyres	number front/rear		pc	2/2	2/2
	39		dimension front			14.00-24	14.00-24
	40		dimension rear			14.00-24	14.00-24
	41	Wheelbase	y		mm	3920	3920
	42	Track	front/rear		mm	2140/2140 (2340/2340)	2140/2140 (2340/2340)
	43	Ground clearance	with load m1 below mast		mm	300	300
	44		with load m2 mid wheelbase		mm	300	300
45	Service brake	front/rear		hydraulic / hydrostatic			
Transmission	46	Parking brake	rear		electrohydraulic		
	47	Battery			start battery		
	48		voltage/capacity	V/Ah	24/135		
	49	Engine	manufacturer/model		Perkins 1206E-E66TA Common Rail		
	50		max. rated power to DIN 70020		kW(PS)	116,5 (158)	
	51		rated speed		1/min	2200	
	52		cylinders/capacity (ccm)		6/6600		
	53	Transmission			hydrostatic		
	54	Clutch			seamless clutch		
55	Stability			ISO 22915			

Technical changes reserved. * with wooden platform

01.05.2015 Rev.0