


## Single impeller centrifugal pumps

suitable for increased domestic and agricultural irrigation presser

### ETA BLOCK 50-200

pump specifications		
fluid Information	type of fluid	Clean water
	max.temperature	90 c°
max Pressure	4 (bar)	
pipe size	Suction	3 inch
	dis charg	2 inch
Material	impeller	Steel Cast Iron
	casing	Cast iron
	shaft	Steel
	Mechanical	MG1/MG9

Motor Specification	
Revolution	3000 PRM 7.5 Kw
Insulation class	f
protection	IP54
frequency	50 Hz
casing material	Aluminum

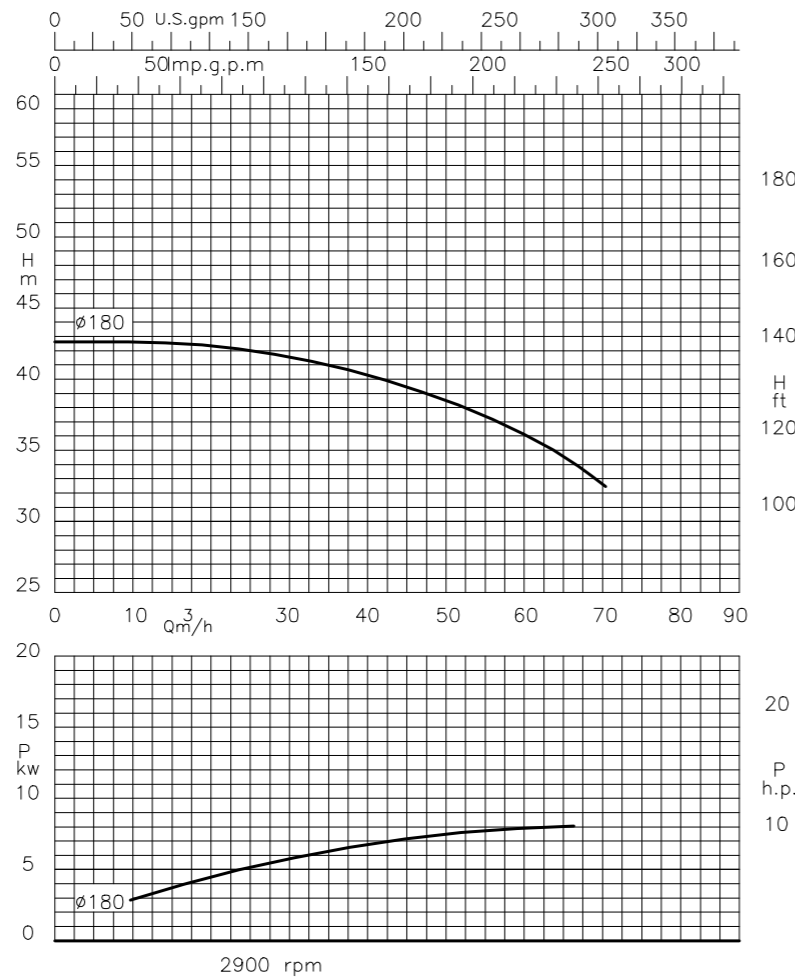


technical Specifications					type				
Q (m³/h - L/min)					50/200				
	40	30	10	0	Ampere	P (hp)	P (kw)	P1 (kw)	
	667	500	166	0					
H (m)					3~				
	38	39.5	41	43	15.6	10	7.5	7.5	

## الکتروپمپ سانتریفیوژ تک پروانه

مناسب جهت افزایش فشار سیستم‌های آبیاری و کشاورزی و ساختمانی

### ETA BLOCK 50-200

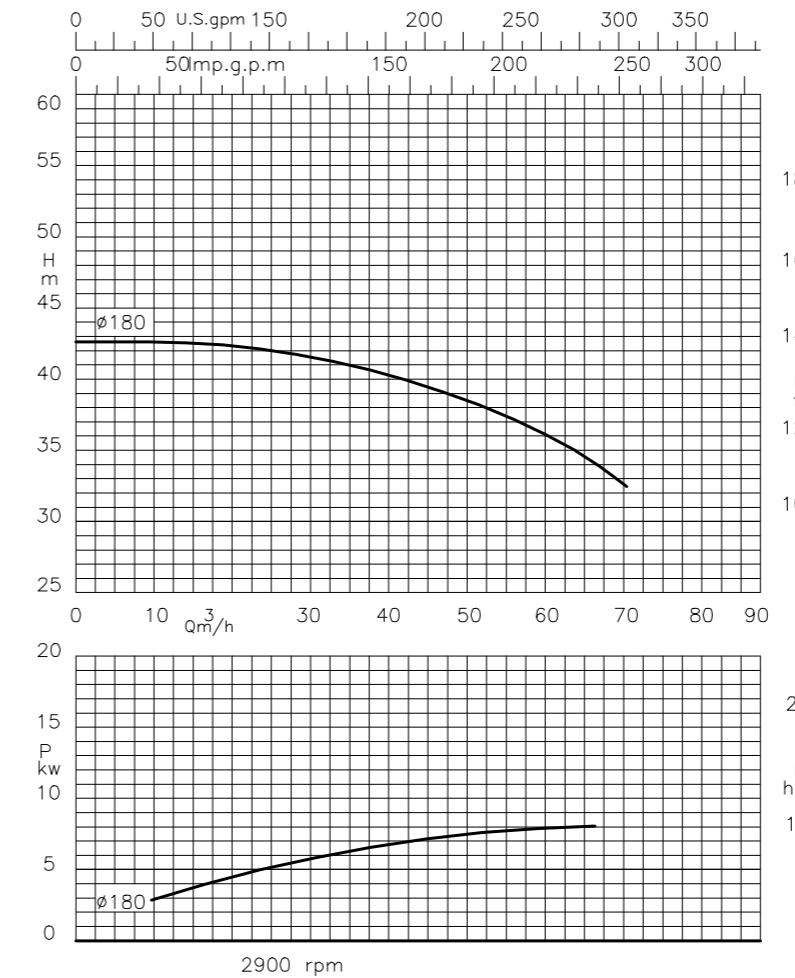

مشخصات پمپ		
آب تمیز	نوع مایع	مشخصات سیال
90 c°	حداکثر دما	
4 (bar)		حداکثر فشار
3 اینچ	مکش	اتصالات لوله
2 اینچ	رانش	
چدن / استیل	پروانه	جنس مواد
چدن	پوسته	
استیل	شفت	
MG1 / MG9	مکانیکال سیل	

مشخصات موتور	
3000 PRM 7.5 Kw	دور موتور
f	کلاس عایق بندی
IP 54	درجه محافظت
50Hz	فرکانس
آلومینیوم	جنس پوسته

تیپ		جدول مشخصات فنی							
50/200		Q (m³/h - L/min)							
P1 (kw)	P (kw)	P (hp)	Ampere	0	10	30	40		
				0	166	500	667		
				H (m)					
7.5	7.5	10	15.6	43	41	39.5	38		