


## Single impeller centrifugal pumps

suitable for increased domestic and agricultural irrigation presser


### ETA BLOCK 80-200

pump specifications		
fluid Information	type of fluid	Clean water
	max.temperature	90 c°
max Pressure	2 (bar)	
pipe size	Suction	4 inch
	dis charg	3 inch
Material	impeller	Steel Cast Iron
	casing	Cast iron
	shaft	Steel
	Mechanical	MG1/MG9

Motor Specification	
Revolution	1500 PRM 5.5 Kw
Insulation class	f
protection	IP54
frequency	50 Hz
casing material	Aluminum

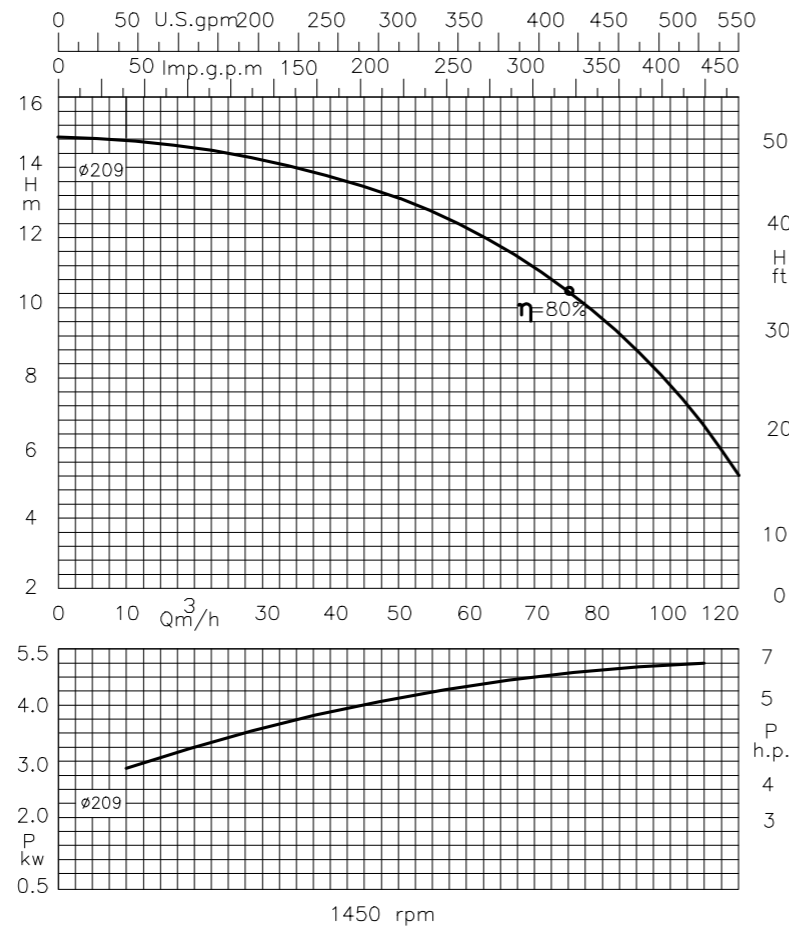

### ETA BLOCK 80-200

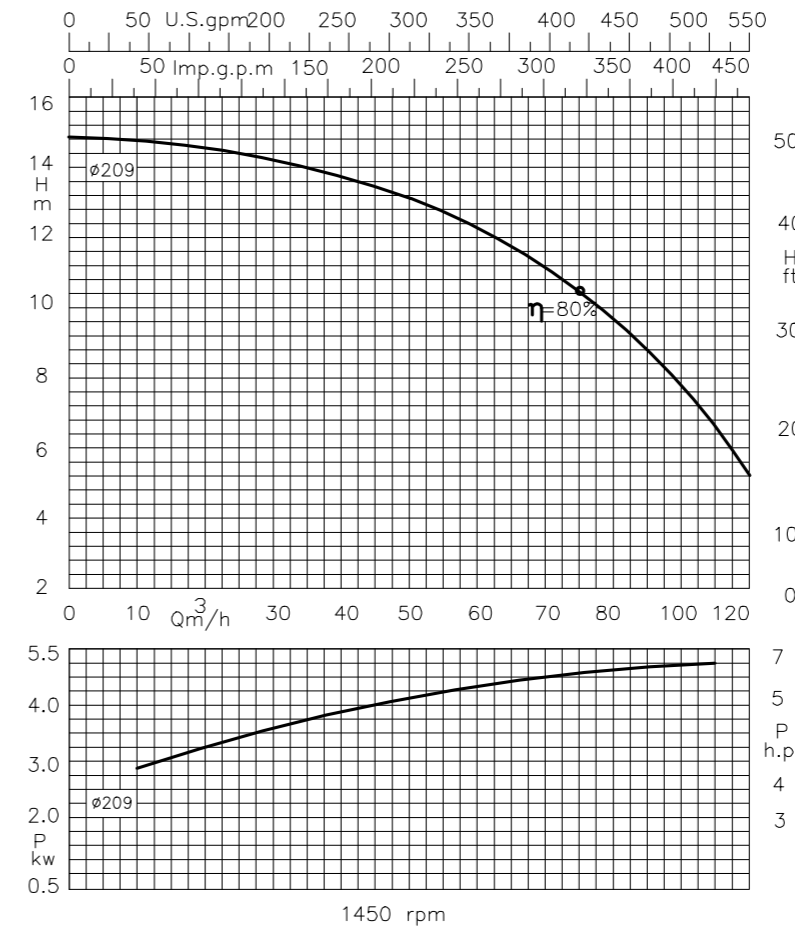

## الکتروپمپ سانتریفیوژ تک پروانه

مناسب جهت استفاده در کشاورزی و سیرکولاتورهای صنعتی

مشخصات پمپ		
آب تمیز	نوع مایع	مشخصات سیال
90 c°	حداکثر دما	
2 (bar)		حداکثر فشار
۴ اینچ	مکش	اتصالات لوله
۳ اینچ	رانش	
چدن / استیل	پروانه	جنس مواد
چدن	پوسته	
استیل	شفت	
MG1 / MG9	مکانیکال سیل	

مشخصات موتور	
1500 PRM 5.5 Kw	دور موتور
f	کلاس عایق بندی
IP 54	درجه محافظت
50Hz	فرکانس
آلومینیوم	جنس پوسته

technical Specifications						type			
Q (m³/h - L/min)						80/200			
120	100	80	60	40	0	Ampere	P (hp)	P (kw)	P1 (kw)
2000	1667	1334	1000	667	0				
H (m)						3~	P (hp)	P (kw)	P1 (kw)
7.7	10.5	12.4	13.6	14.3	15.2				

تیپ				جدول مشخصات فنی					
80/200				Q (m³/h - L/min)					
P1 (kw)	P (kw)	P (hp)	Ampere	0	40	60	80	100	120
				0	667	1000	1334	1667	2000
				H (m)					
4	5.5	7.5	11.6	15.2	14.3	13.6	12.4	10.5	7.7