


Single impeller centrifugal pumps

suitable for increased domestic and agricultural irrigation presser

ETA BLOCK 125-200

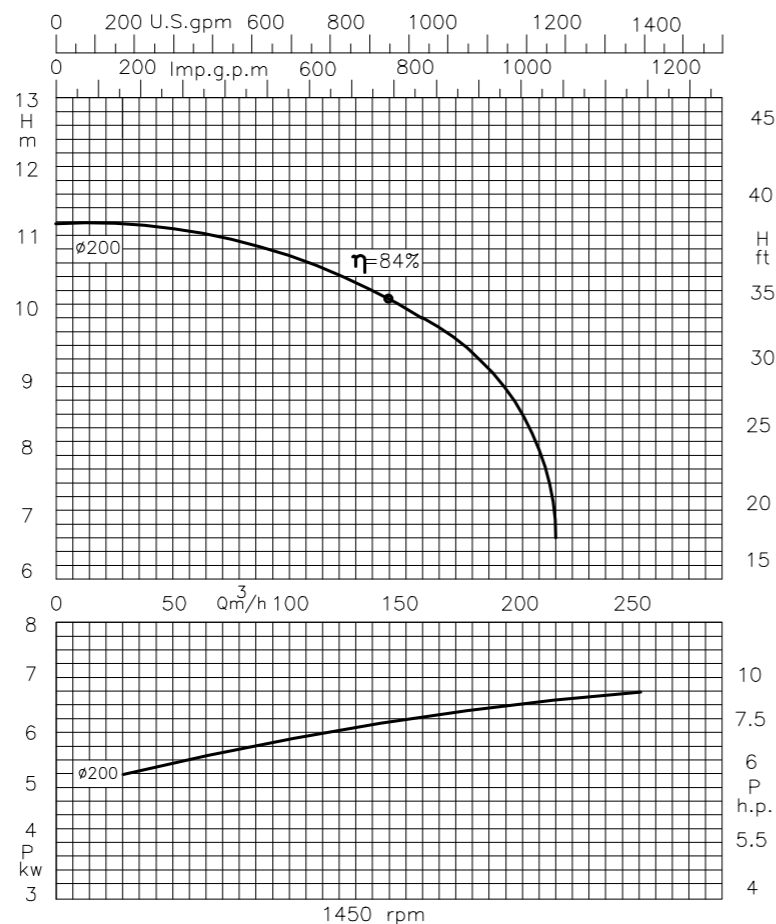

pump specifications		
fluid Information	type of fluid	Clean water
	max.temperature	90 c°
max Pressure	4 (bar)	
pipe size	Suction	5 inch
	dis charg	4 inch
Material	impeller	Steel Cast Iron
	casing	Cast iron
	shaft	Steel
	Mechanical	MG1/MG9


Motor Specification	
Revolution	1500 PRM 5.5 Kw
Insulation class	f
protection	IP54
frequency	50 Hz
casing material	Aluminum

technical Specifications					type				
Q (m³/h - L/min)					125/200				
	200	150	100	50	0	Ampere	P (hp)	P (kw)	P1 (kw)
	3333	2500	1667	834	0				
H (m)					3~				
	7.8	10.1	11.2	11.4	12	15.6	10	7.5	7.5

الکتروپمپ سانتریفیوژ تک پروانه

مناسب جهت استفاده در کشاورزی و سیرکولاتورهای صنعتی

ETA BLOCK 125-200

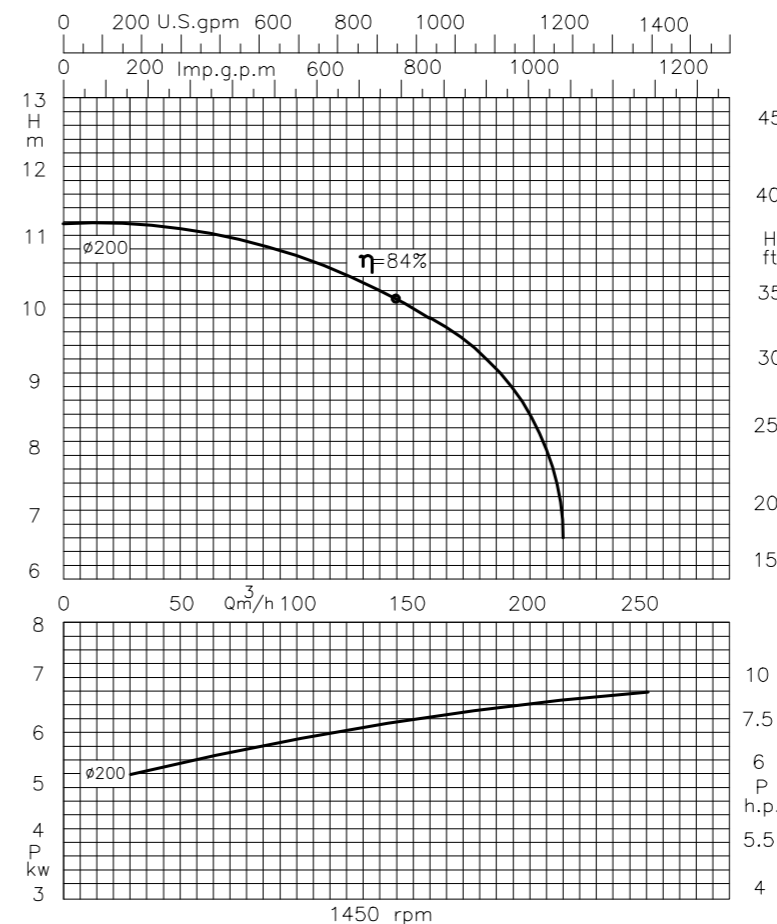

مشخصات پمپ		
آب تمیز	نوع مایع	مشخصات سیال
90 c°	حداکثر دما	
4 (bar)		حداکثر فشار
۵ اینچ	مکش	اتصالات لوله
۴ اینچ	رانش	
چدن / استیل	پروانه	جنس مواد
چدن	پوسته	
استیل	شفت	
MG1 / MG9	مکانیکال سیل	

مشخصات موتور	
1500 PRM 5.5 Kw	دورموتور
f	کلاس عایق بندی
IP 54	درجه محافظت
50Hz	فرکانس
آلومینیوم	جنس پوسته

تیپ			جدول مشخصات فنی						
125/200			Q (m³/h - L/min)						
P1 (kw)	P (kw)	P (hp)	Ampere	0	50	100	130	200	
				0	834	1667	2500	3333	
			3~	H (m)					
7.5	7.5	10	15.6	12	11.4	11.2	10.1	7.8	