



ISO8528

This generator set has been designed to meet ISO 8528 regulation.

SZUTEST

This generator set is manufactured in facilities certified to ISO 9001.



This generator set is available with CE certification.

2000/14/EC

Enclosed product is tested according to EU noise legislation 2000/14/EC

3 Phase Ratings, 50 Hz, PF 0,8

Voltage	Standby Rating (ESP)		Prime Rating (PRP)		
	kVA	kw	kVA	kw	Amp
400/230	450,00	360,00	400,00	320,00	577,00

Standby Rating (ESP): Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. ESP is in accordance with ISO 8528. Overload is not allowed.

Prime Rating (PRP): Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528. 10 % overload capability is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046.

STANDARD SPECIFICATIONS

- Water cooled, Diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Base frame design incorporates an integral fuel tank and anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately (for open sets)
- Static battery charger
- Manual for application and installation

OPTIONAL EQUIPMENTS

ENGINE

- Fuel-Water Separator Filter
- Oil heater

ALTERNATOR

- Anti-Condensation Heater
- Main line circuit breaker

CONTROL SYSTEM

- Automatic synchronising and power control system (multi gen-set Parallel)
- Parallel system with mains.
- Transition synchronization with mains
- Remote relay output
- Alarm output relays
- Remote communication with modem
- Earth fault, single set
- Charge Ammeter

OTHER ACCESSORIES

- Automatic or manual fuel filling system
- Manual oil drain pump
- Low and high fuel level alarm
- Residential silencer
- Enclosure: weather protective or sound attenuated
- Duct adapter (on radiator)
- Inlet and outlet motorised louvers
- Inlet and outlet acoustic baffles
- Tool kit for maintenance
- 1500/3000 hours maintenance kit
- Supplied with oil and coolant - 30 °C
- Main Fuel Tank

TRANSFER SWITCH

- Three or four pole contactor
- Three or four pole motor operated circuit breaker

➤ DIESEL ENGINE SPECIFICATIONS

Manufacturer		Volvo Penta	تولید کننده
Model		TAD1344GE	مدل
No. of Cylinders and Build		6 Cylinder, In Line	تعداد سیلندرها و نوع آرایش آنها
Aspiration and Cooling		Turbo Charged and After Cooled	سیستم تنفس و خنک کاری
Maximum Standby Power		1500 rpm	توان Standby
		399,00 kw [543,00HP]	
Total Displacement	L	12,780	جابه جایی کل
Bore and Stroke	mm	131X158	قطر سیلندر و کورس پیستون
Compression Ratio		18,1:1	نسبت تراکم
Rated Speed (rpm)	rpm	1500	سرعت مجاز
Governor		Electronic	گاورنر
Oil Capacity	L	36,00	ظرفیت روغن
Coolant Capacity	L	44,00	ظرفیت خنک کننده
Intake Air Flow	m ³ /min.	28,00	جریان هوای مصرفی
Radiator Cooling Air	m ³ /min.	390,00	میزان هوای خنک کننده رادیاتور
Start System		24 V d.c.	استارت
Fuel Consumption		%75	مصرف سوخت
		63,30	


➤ ALTERNATOR SPECIFICATIONS

Make		Mecc Alte	تولید کننده
Model		ECO40 2S/4	مدل
Frequency	Hz	50	فرکانس
Power	kVA	400,00	توان
Design		Brushless, 4 poles	طراحی
Cos Phi		0,80	کسینوس فی
Phase		3	فاز
Voltage	V	400/230	ولتاژ
Current	A	577,00	جریان
Insulation Class		H	کلاس عایق بندی
Excitation System		Electronic (AVR)	سیستم تحریک

➤ DIEMENSIONS AND WEIGHT

Open Type				
AVP 450		3213,00	1550,00	1855,00
Canopy				
MS 70		4460	1606	2477
				700

1 P 732 control system - Control System

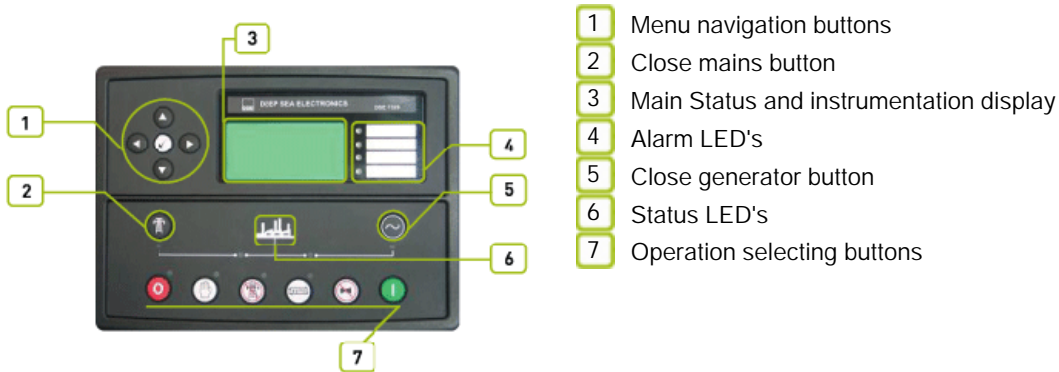

- 1 Menu navigation buttons
- 2 Close mains button
- 3 Main Status and instrumentation display
- 4 Alarm LED's
- 5 Close generator button
- 6 Status LED's
- 7 Operation selecting buttons

2 Devices

DSE, model 7320 Auto Mains Failure control module
 Static battery charger
 Emergency stop push button and fuses for control circuits

3 Construction and Finish

Components installed in sheet steel enclosure. Phosphate chemical, pre-coating of steel provides corrosion resistant surface
 Polyester composite powder topcoat forms high gloss and extremely durable finish
 Lockable hinged panel door provides for easy component access

4 Installation

Control panel is mounted generating set baseframe on robust steel stand or power module.
 Located at side of generating set with properly panel visibility.

5 Generating Set Control Unit

The DSE 7320 control module is a standard addition to our generator sets from 220 kVA upwards and it has been designed to start and stop diesel and gas generating sets that include electronic and non electronic engines. The DSE 7320 includes the additional capability of being able to monitor a mains (utility) supply and is therefore suitable for controlling a standby generating set in conjunction with an automatic transfer switch. The DSE 7320 also indicates operational status and fault conditions, automatically shutting down the generating set and indicating faults by means of its LCD display on the front panel.

Standard Specifications

Microprocessor controlled
 132 x 64 pixel LCD display makes information easy to read
 Front panel programming and also via PC software
 Soft touch membrane keypad and five key menu navigation
 Remote communications via RS232, RS485 and ethernet and SMS messaging
 Event logging (50) showing date and time
 Multiple date and time engine exercise mode and maintenance scheduler
 Engine block heater control.
 Controls; stop, manual, auto, test, start, mute lamb test/transfer to generator, transfer to mains, menu navigation.

• Instruments

ENGINE
 Engine speed
 Oil pressure
 Coolant temperature
 Run time
 Battery volts
 Engine maintenance due
 GENERATOR
 Voltage (L-L, L-N)
 Current (L1-L2-L3)
 Frequency
 Earth current
 kW
 Pf
 kVAr
 kWh, kVAh, kVArh
 Phase sequence
 MAINS
 Voltage (L-L, L-N)
 Frequency

• Protection Circuits

WARNING
 Charge failure
 Battery under voltage
 Fail to stop
 Low fuel level (opt.)
 kW over load
 Negative phase sequence
 Loss of speed signal
 PRE-ALARMS
 Low oil pressure
 High engine temperature
 Low engine temperature
 Over /Under speed
 Under/over generator frequency
 Under/over generator voltage
 ECU warning
 SHUT DOWNS
 Fail to start
 Emergency stop
 Low oil pressure
 High engine temperature
 Low coolant level
 Over /Under speed
 Under/over generator frequency
 Under/over generator voltage
 Oil pressure sensor open
 Phase rotation
 ELECTRICAL TRIP
 Earth fault
 kW over load
 Generator over current
 Negative phase sequence

• Options

High oil temperature shut down
 Low fuel level shut down
 Low fuel level alarm
 High fuel level alarm
 EXPANSION MODULES
 Editional LED module (2548)
 Expansion relay module (2157)
 Expansion input module (2130)


• Standards

Electrical Safety / EMC compatibility
 BS EN 60950 Electrical business equipment
 BS EN 61000-6-2 EMC immunity standard
 BS EN 61000-6-4 EMC emission standard

• Static Battery Charger

6UHfVfmVUf[Yf]g'a Ubi ZUM FYX'k]h'gk]HV]b[!a cXY'UbX'GA 8'fVWbc`c[mUbX'ih\Ug\][\ YZZ]bVWf
 6UHfVfmVUf[Yf'a cXY'gfci hdi hJ !=VUfUWVf]gh]W]g]j YfmVWcgY'hc'gei UfY'&(\$) \Ug'Z`mici hdi hg\chVfVW]hdfchVW]cb UbX
 ihVWb'VY i gYX'Ug'U'W'ffYbhgci fVW"
 &(\$) VUf[Yf\Ug\][\ YZZ]VYbVWz`cb["]Zz`ck'ZU]i fY'fUYZ`][\hk Y][\hiUbX`ck \YUhfUX]UfYX']b UWVcfXUbW'k]h' "]bYUf
 U'fYfbU]j Yg"
 H\Y VUf[Yf]g'Z]HYX'k]h' U'dfchVW]cb'X]cXY'UWVcggh'Y'ci hdi h'7\Uf[Y'ZU]`ci hdi h]g'Uj U]UVY""7cbbYVWVUf[Y'ZU]`fY'Um
 Vt`] VYfk YYb dcg]h]j Y ci hdi hUbX'7: ci hdi h'
 hdi h'%*!&*(J"
 Ci hdi h'&+Z'J') 5'cf% ž J') 5"

MS 70 - Canopy

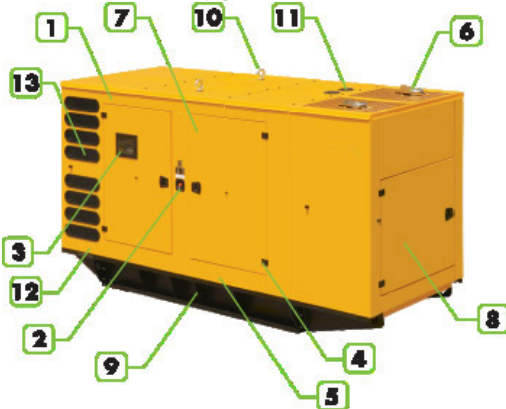

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

Introduction

Sound-attenuated and weather protective enclosures for generating sets from Abyaran, meet even the sound requirements and provide optimum protection from inclement weather and development by our specialist acoustic engineers. Our modular designed sound insulated canopies provide ease of access for servicing and general maintenance and interchangeable components permitting on-site repair. Enclosures are designed to optimize genset cooling performance, providing you with confidence that genset ratings and ambient capability.

Standard Specifications

Compact footprint, low profile design.

Enclosure, generator set, exhaust system and fuel tank are pre-assembled, pre-integrated and shipped as one package

Body made from steel components treated with polyester powder coating

Fire retardant foam insulation

Easy access to all service points

Exhaust system inside canopy

Large doors on each side

Control panel viewing window in a lockable access door

Emergency stop push button mounted on enclosure exterior

Cooling fan and battery charging alternator fully guarded

Fuel fill and battery can only be reached via lockable access doors.

Lifting points on the top of canopy and base frame

Customer options available to meet your applications needs.

Abyaran makes its generating sets' noise level tests in accordance with directive 2000/14/EC validation of the noise level test has been approved by the notified body Szutest

Width	mm.	1606
Length	mm.	4460
Height	mm.	2477
Fuel Tank Capacity	L	700